

MOLDING POWER INDUCTOR.

Features:


- Low profile and low DCR.
- Shielded construction.
- handles high transient current spikes without saturati
- frequency up to 3MHz
- Ultra Low buzz noise, due to composite construction
- 100% lead (Pb) free meet RoHS standard

Applications

- PDA/Notebook/Desktop, and server applications.
- low profile,high current power supplies.
- Battery powered devices.
- DC/DC converters.



Product Dimensions [unit: inch/ mm]:

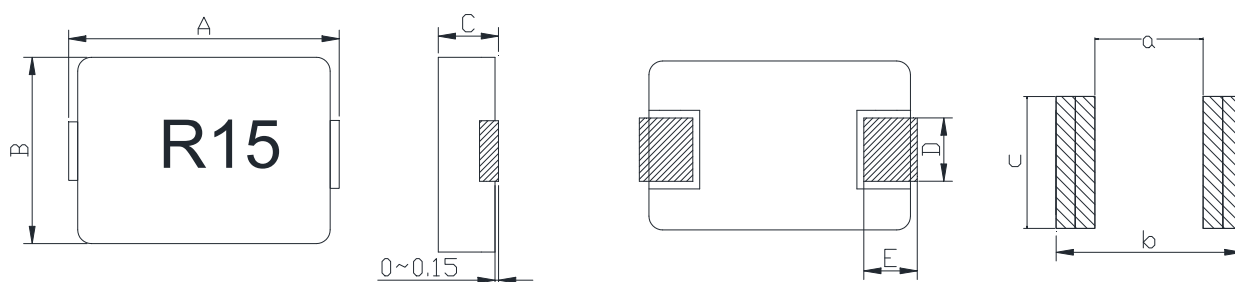

Product Dimensions

A	B	C	D	E	a	b	c
12.80	7.80	4.20	3.50	2.50	6.00	14.50	5.00
±0.40	±0.40	MAX	±0.50	±0.50	TYP	TYP	TYP

PART NUMBERING SYSTEM:

<u>SMIS</u>	<u>130804</u>	<u>XXXX</u>	<u>XXXX</u>
1	2	3	4

1.SERIES NAME

2.DIMENSIONS

3.INDUCTANCE


4.TOLERANCE CODE: J:±5% K:±10% L:±15% M:±20% P:±25% N:±30%

Test instruments :

L tested by Wayne kerr 3260B LCR meter with Wayne kerr 3265B bias current source.

DCR tested by Milli-ohm meter.

MATERIAL LIST:

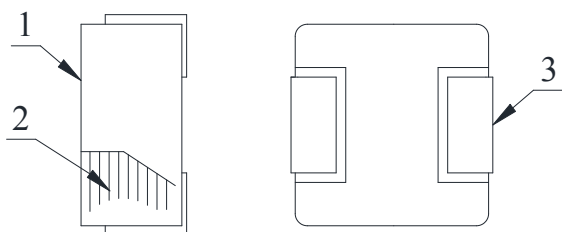



No	Part	Material
1	CORE	Carbonyl powder
2	WIRE	Copper wire
3	BASE	copper
Surface spray paint treatment		

Electrical characteristics for MP130840 series:



P/N	100KHz 1.0V	D.C.R (mΩ)		Saturation Current	Heat Rating Current
	L0(μH) ±20%	Typical	Max	I sat (Amp) Typical	I rms (Amp) Typical
SMIS130804-R15M	0.15	0.41	0.55	85.00	45.00
SMIS130804-R22M	0.22	0.45	0.60	80.00	45.00
SMIS130804-R33M	0.33	1.12	1.30	70.00	35.00
SMIS130804-R47M	0.47	1.12	1.30	60.00	35.00

- All test data is referenced to 25°C ambient
- DC current (Irms) that will cause an approximate ΔT of 40°C
- DC current (Isat) that will cause Lo to drop approximately 30%
- Operating temperature Range: -55°C to +125°C
- Absolute maximum voltage 30VDC
- Operating temperature range -55°C ~ 125°C (Including self - temperature rise)

Typical performance curves:

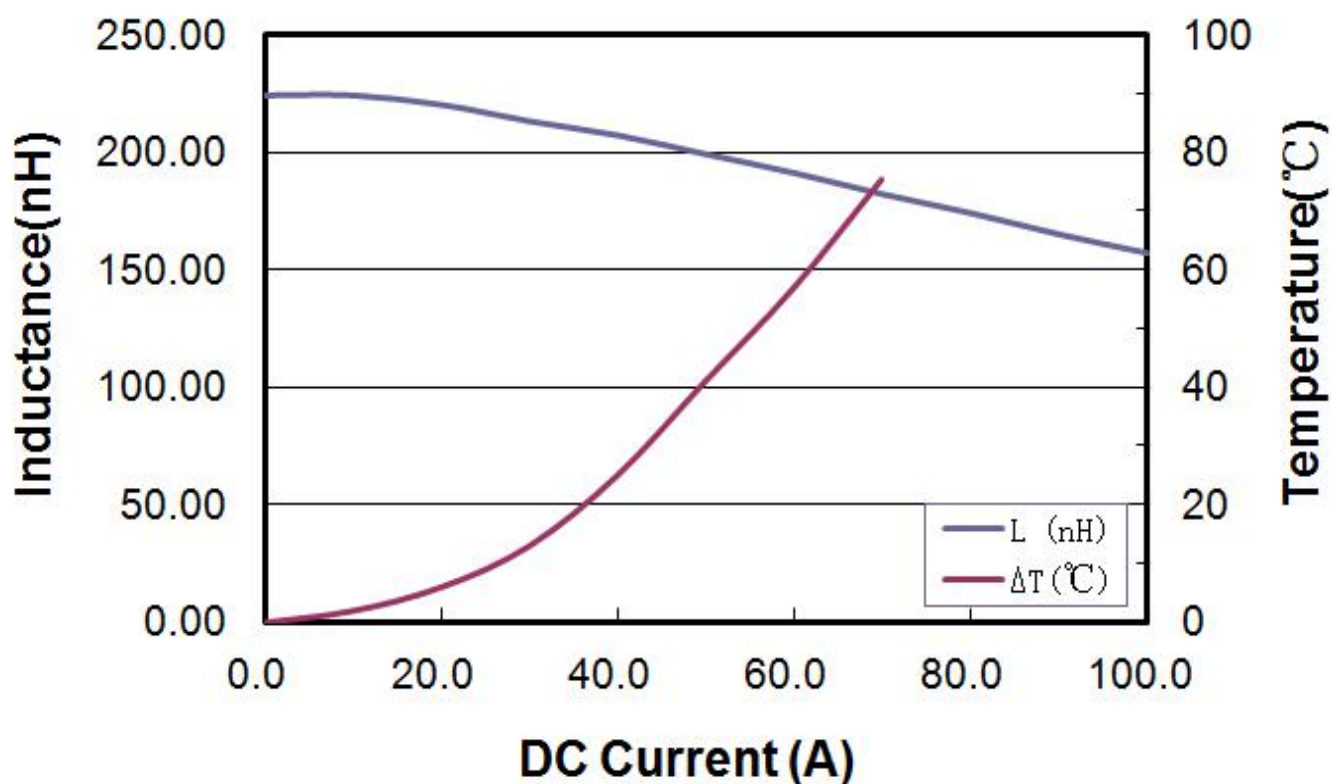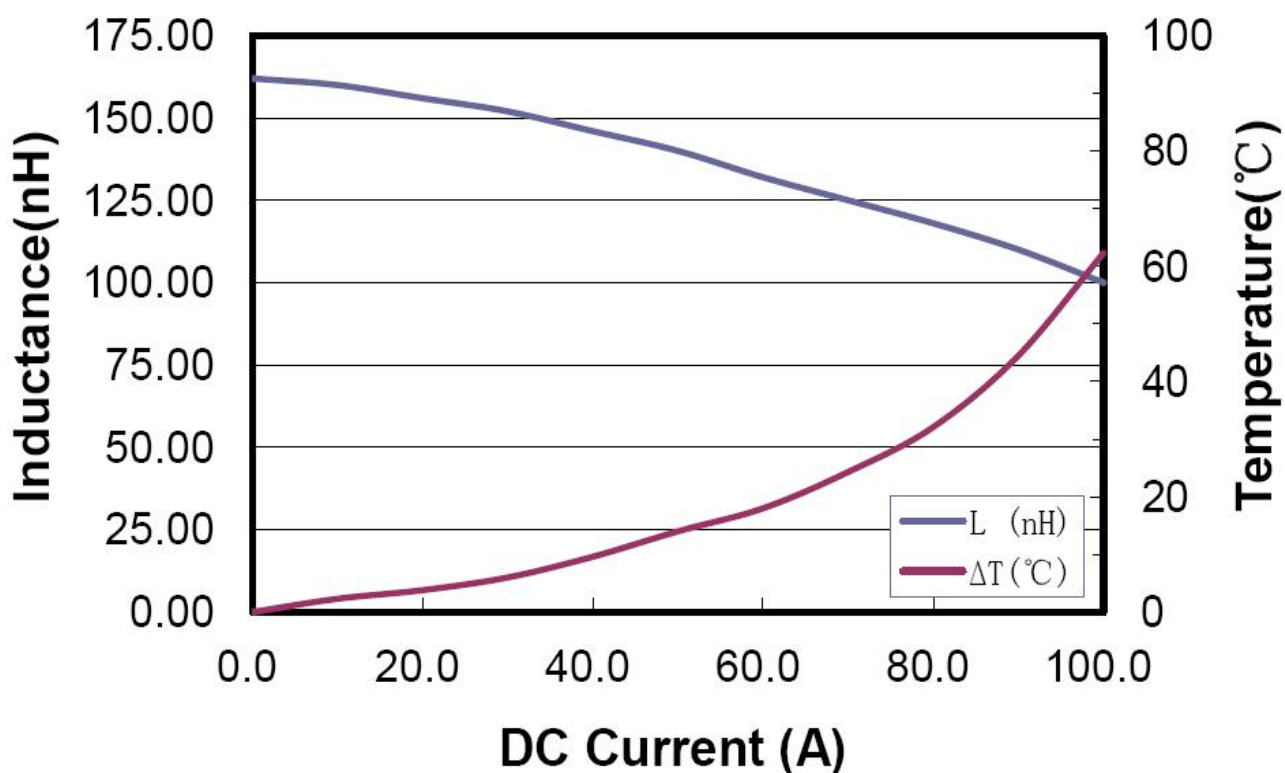


Typical performance curves:

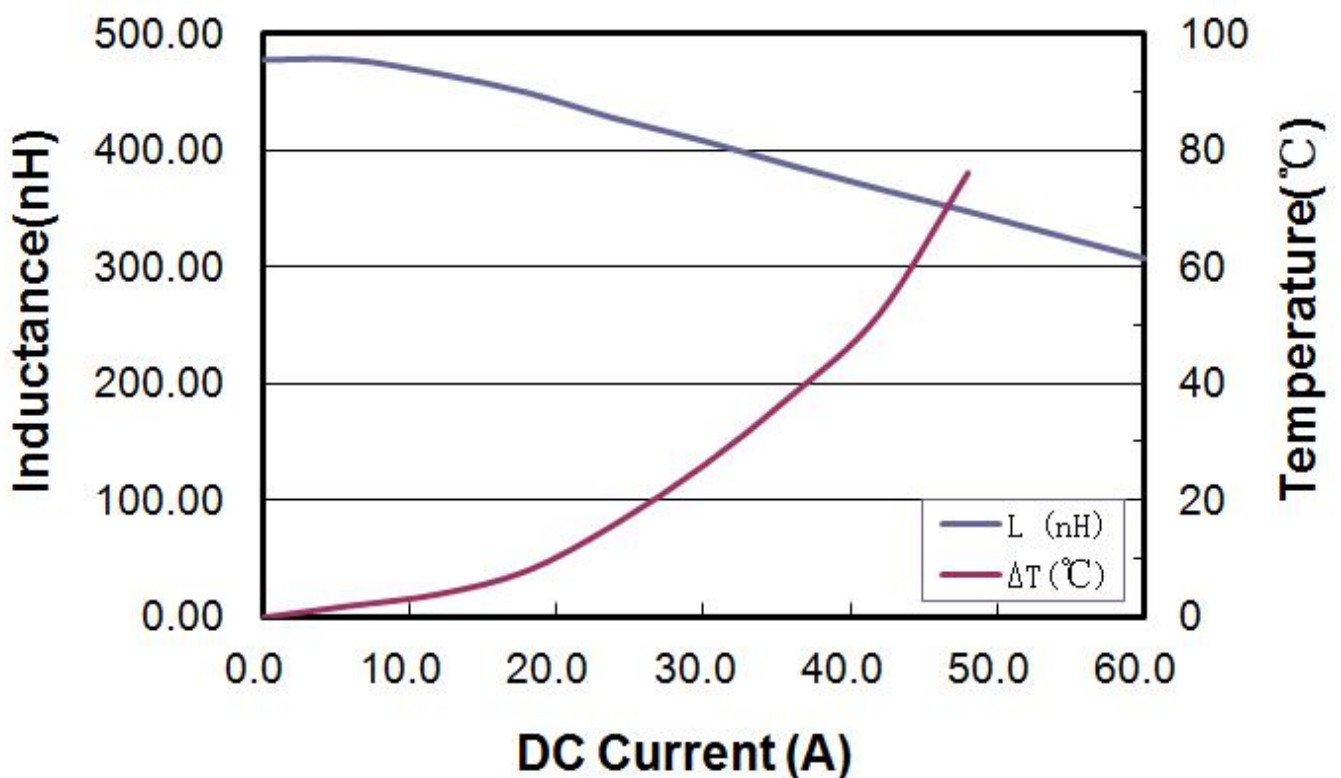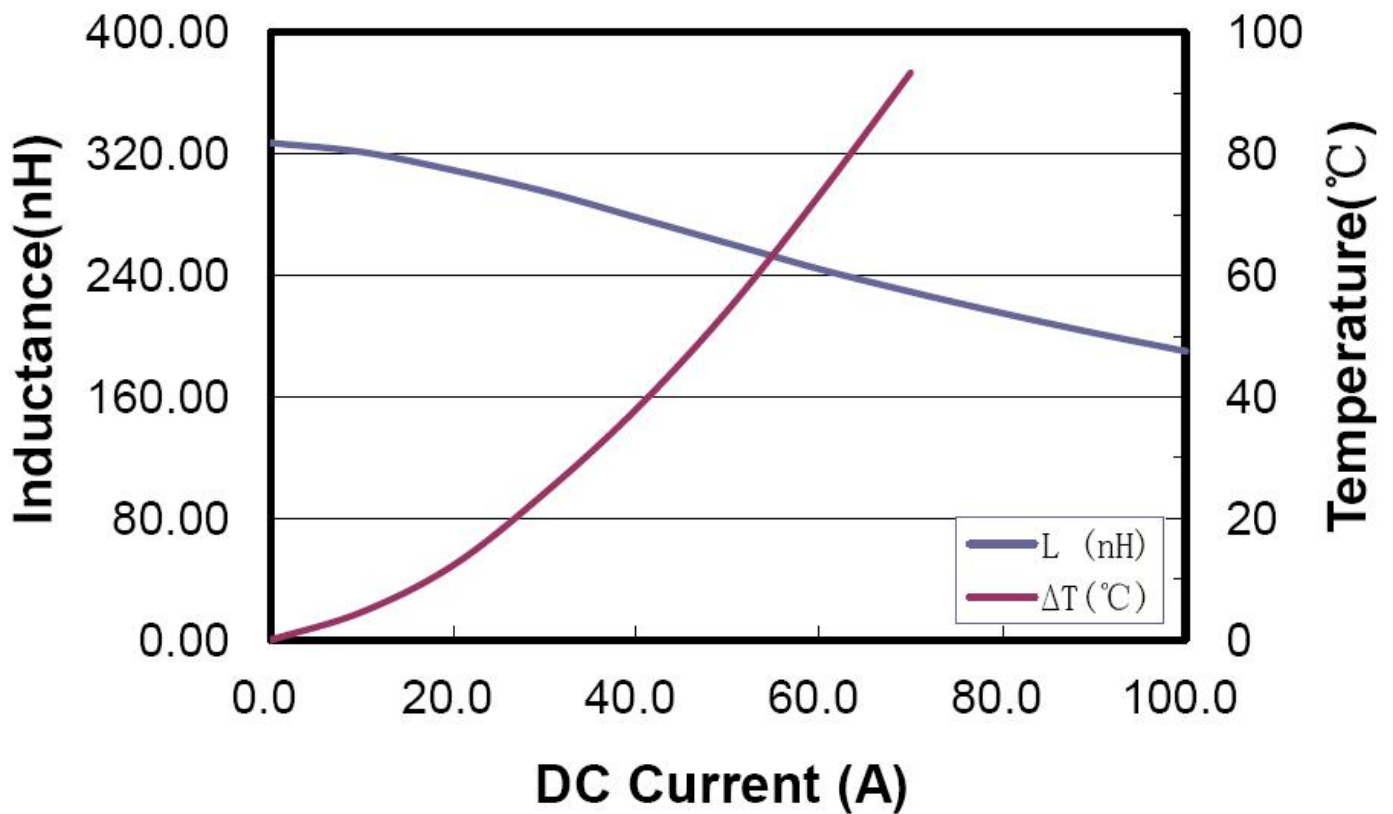

DIMENSIONS FOR CARRIER TAPES (unit:mm)


ITEM	W	A0	B0	K0	P	F	E	D0	D1	P0	P2	T
DIM	24.00 ±0.3	8.30 ±0.3	13.6 ±0.3	4.20 ±0.3	12.00 ±0.1	11.50 ±0.1	1.75 ±0.1	1.50 ±0.1	1.50 ±0.1	4.00 ±0.1	2.00 ±0.1	0.35 ±0.1

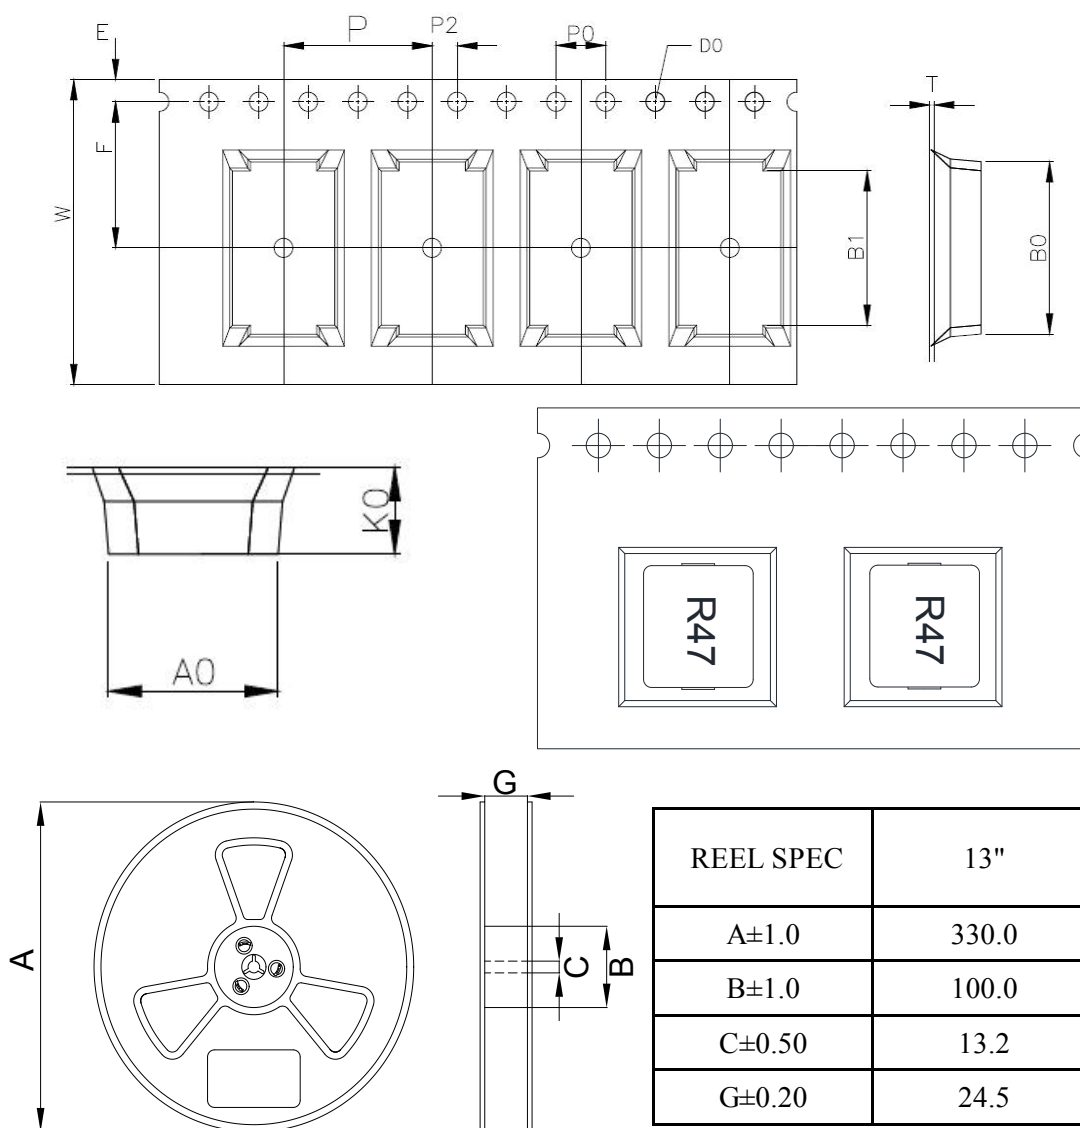


PACKING(mm)

载带宽度 (W)	间距 (P)	卷 (PCS) 13inch	2卷/内箱 (PCS)	3内箱/外箱 (PCS)	产品单重
24	12	1000	2000	6000	2.40g/pcs

Product application examples

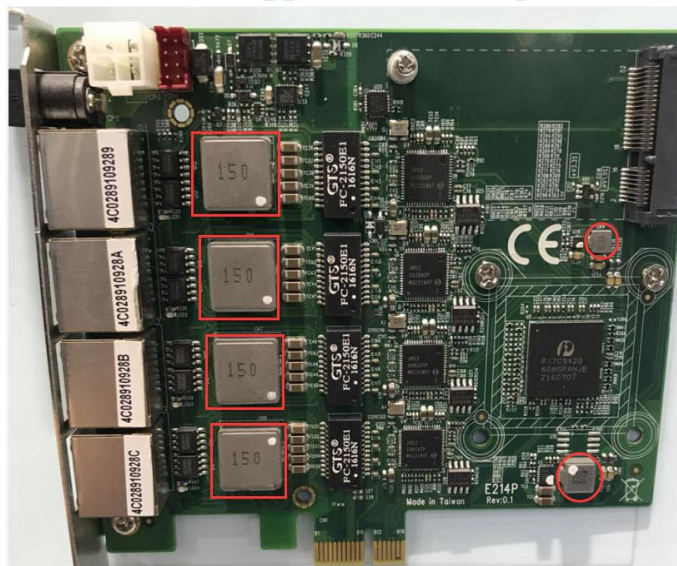


网络扩展卡

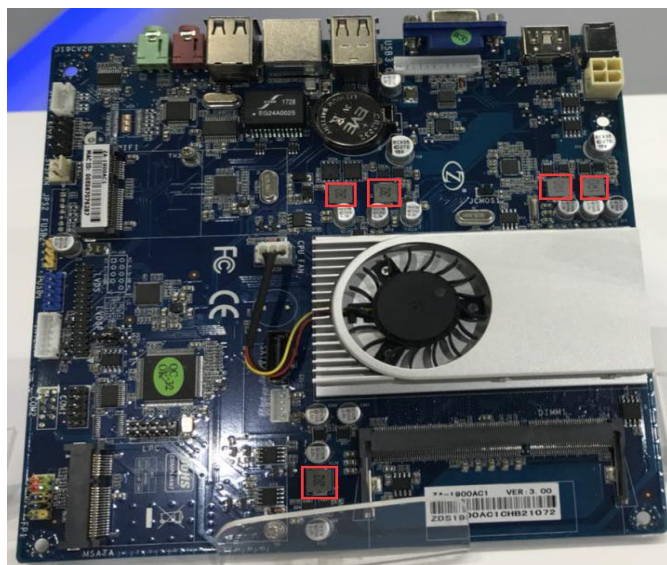


电脑主板（一）




电源卡-电池充电

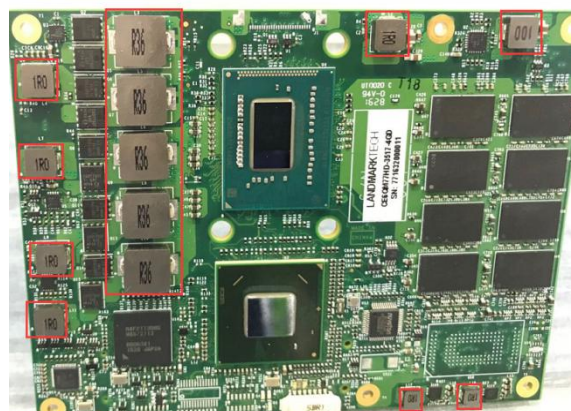

工业主板（二）

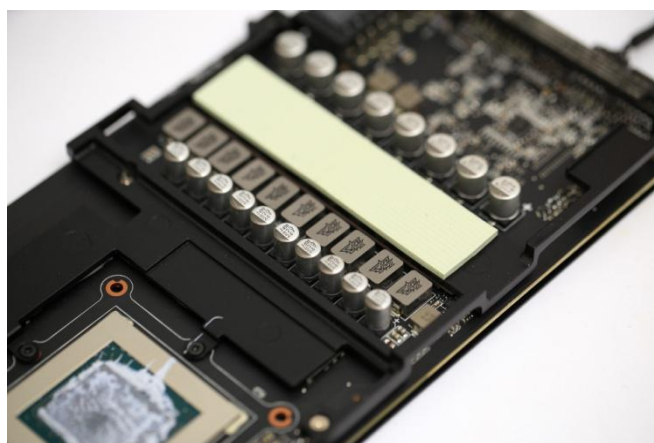

显示卡（一）

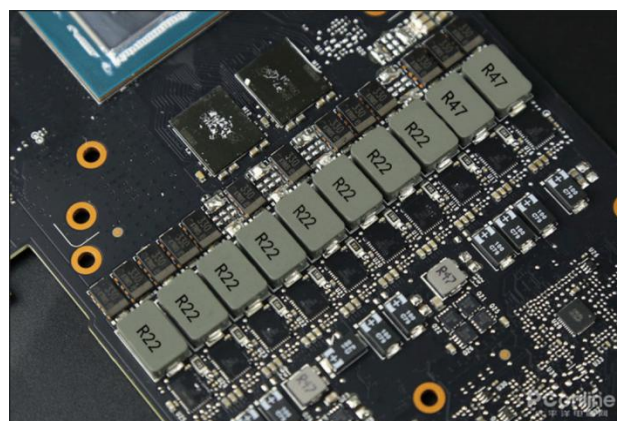

显示卡（二）